




Magneco LEDbox Double Sided

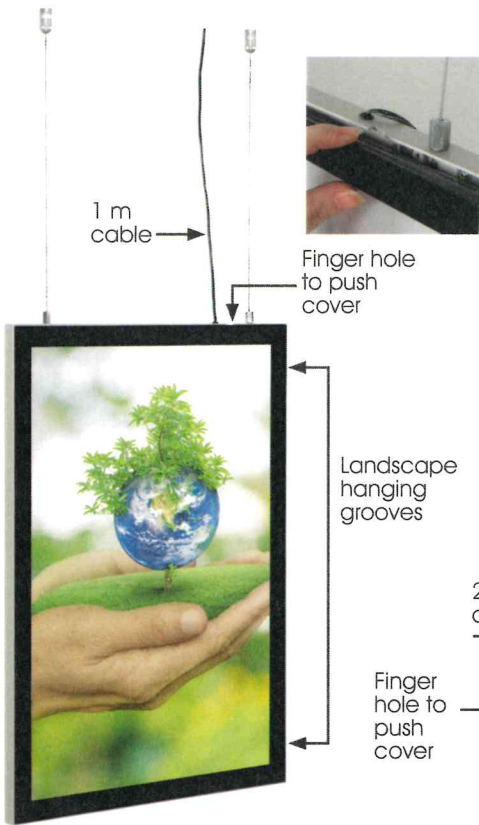


CAUTION

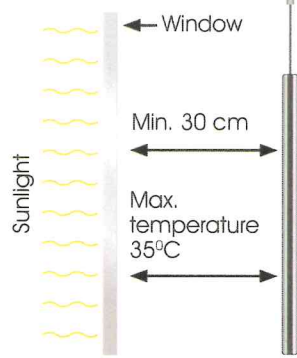


35°C Indoor maximum temperature (incl. daily sunny hours.) It should be assembled 30 cm from the window.

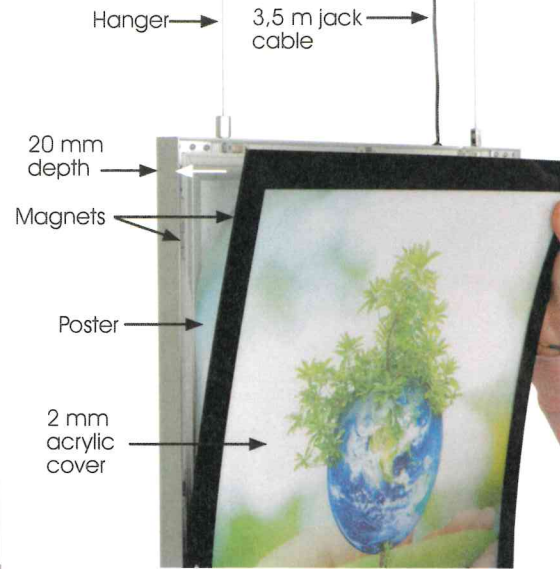

Suitable for use in landscape and portrait positions.

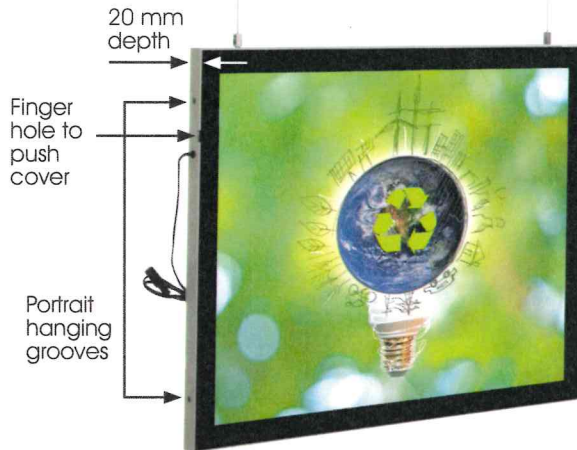


HANGER

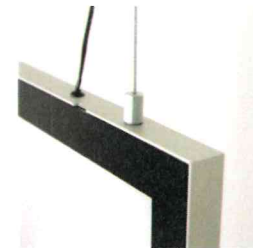

2 wall hangers are standard in each product. Moving hangers let the mounting in portrait and landscape position.


POWER SUPPLY

- 12 V DC
- Complete with power supply
- 2 year guaranteed
- 7/16 use
- If 7/24 use required, please order individually.

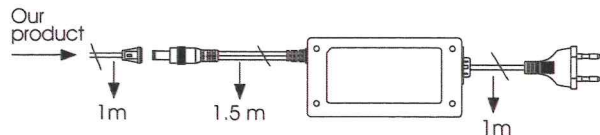

CABLE

Delivered with 3,5 meter long cable and EU plug. UK, US or CH plugs should be specified with order. Extension cable: 1 mm, 2 mm, 3 mm.

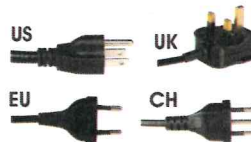

LED FEATURES (Duris E3)

Viewing angle at 50 % IV: 120°
 Color: 2700 K - 6500 K (warm, neutral and cool white)
 CRI: Min. 80
 Luminous Flux: Typ. 30 lm @ 5000 K
 Luminous efficacy: Typ. 153 lm/W @ 5000 K
 Lumen Maintenance: Testing according to IESNA LM-80 in progress
 Life Time : 50,000 Hours
 Colour: 5700 K -6500 K (White)*
 *For special inquired colour is available in 2700 K -6500 K

TECHNICAL SPECIFICATION

SILVER ARTICLE	BLACK ARTICLE	POSTER	ACRYLIC THICKNESS	ILLUMINATION	POWER CONSUMPTION	POWER SUPPLY RECOMMENDED
ULDMENCBA4	ULDMEBCBA4	210 X 297 mm	3 mm	2800-3000 LUX	9.5 W / 0.79 A	1 A
ULDMENCBA3	ULDMEBCBA3	297 X 420 mm	3 mm	2400-2600 LUX	14 W / 1.15 A	2 A
ULDMENCBA2	ULDMEBCBA2	420 X 594 mm	3 mm	2100-2300 LUX	20 W / 1.66 A	2 A
ULDMENCBA1	ULDMEBCBA1	594 X 841 mm	4 mm	1800-2000 LUX	28.5 W / 2.38 A	3 A
ULDMENCBA0	ULDMEBCBA0	841 X 1189 mm	4 mm	1200-1400 LUX	40.5 W / 3.39 A	4 A
ULDMENCBB2	ULDMEBCBB2	500 X 700 mm	3 mm	2000-2200 LUX	24 W / 2 A	3 A
ULDMENCBB1	ULDMEBCBB1	700 X 1000 mm	4 mm	1600-1800 LUX	35 W / 2.9 A	4 A
ULDMENCB17	ULDMEBCB17	280 X 432 mm	3 mm	2400-2600 LUX	16.6 W / 1.22 A	2 A
ULDMENCB22	ULDMEBCB22	559 X 712 mm	4 mm	1900-2100 LUX	24 W / 2 A	3 A
ULDMENCB23	ULDMEBCB23	508 X 762 mm	3 mm	2000-2200 LUX	26 W / 2.16 A	3 A
ULDMENCB24	ULDMEBCB24	610 X 915 mm	4 mm	1800-2000 LUX	31 W / 2.6 A	3 A
ULDMENCB34	ULDMEBCB34	762 X 1016 mm	4 mm	1600-1800 LUX	36 W / 3.02 A	4 A



ASSEMBLY SHEET

